

BOXTEC

NINJA POS

Ultra-Slim POS Solution




KEY FEATURES:

- Integrated with Intel® Alder Lake-N and Meteor Lake processors
- Support Windows, Linux, and Android operating systems
- Effortlessly access the motherboard box for easy service and expansion
- Versatile selection of peripherals for better functionality

DIMENSIONS

NINJA POS

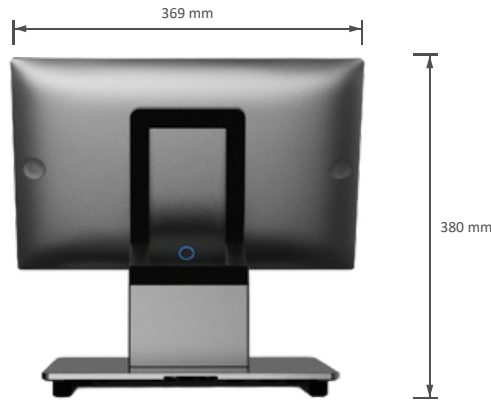

System	Motherboard	G35	G75U
	Processor	Intel® Alder Lake N: N97, i3-N305	Intel® Meteor Lake Core Ultra 5 125U
Display	Memory	1x DDR4 up to 8GB	1x onboard DDR5 8GB (default) & 1x DDR5 up to 8GB
	Storage	128GB SSD (M.2)	128GB SSD (M.2)
Expansion	Size and Resolution	15.6" 1920 x 1080	15.6" 1920 x 1080
	Touch Screen	True-Flat PCAP multi-touch	True-Flat PCAP multi-touch
I/O Ports	M.2 (E Key)	1	1
	USB Type-A	2x USB3.0 4x USB2.0	4x USB3.0 2x USB2.0
Optional I/O Port	USB Type-C FeDP	1x USB3.0 full-functioned (DP/ PD 5V/3A, 12V/3A) 2x Flytech proprietary miniDP (1x for main display, 1x for 2nd display)	1x USB3.0 full-functioned (DP/ PD 5V/3A, 12V/3A) 2x Flytech proprietary miniDP (1x for main display, 1x for 2nd display)
	Serial Port	3x RJ48 (standard RS232) (default 0V; 5V, 12V)	3x RJ48 (standard RS232) (default 0V; 5V, 12V)
Audio	LAN	1x RJ45	1x RJ45
	Cash Drawer	1x RJ11	1x RJ11
Indicator	DC Jack	1x 4PIN (with latch)	1x 4PIN (with latch)
	Powered USB	2x Powered USB 12V 1x Powered USB 24V	2x Powered USB 12V 1x Powered USB 24V
Power	Internal Speaker	1x 3W (Option)	1x 3W (Option)
	Power Button	1	1
Communication	Power Adapter WLAN	65W/19V (120W/19V with 2x PUSB 12V & 1x PUSB 24V)	120W/19V
	+ BT	802.11 series + BT5.0 (Option)	802.11 series + BT5.0 (Option)
Peripheral (option)	MSR	3-Track MSR (USB)	3-Track MSR (USB)
	Fingerprint	Fingerprint Reader (USB)	Fingerprint Reader (USB)
Certificate	NFC	NFC Reader (USB)	NFC Reader (USB)
	iButton	iButton (USB)	iButton (USB)
Environment	Scanner	2D Scanner (USB)	2D Scanner (USB)
	Customer Display	LCM Display 2 x 20 characters (USB)	LCM Display 2 x 20 characters (USB)
Dimensions	2nd Display	11.6" 2nd Display	11.6" 2nd Display
	EMC & Safety	FCC Class A, CE Mark, LVD	FCC Class A, CE Mark, LVD
Weight	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)
OS Supported	Humidity	20% ~ 85% RH non-condensing	20% ~ 85% RH non-condensing
	W x H x D	369 x 380 x 200 mm (14.5" x 15" x 7.9")	369 x 380 x 200 mm (14.5" x 15" x 7.9")
OS Supported	Weight	5 kg	5 kg
		Windows 10 IoT Enterprise, Linux, Android 13.0	Windows 10 IoT Enterprise, Linux, Android 13.0

※ PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE ※